



## Lens Ø20mm -20° FWHM - MEDIUM with legs

### Low Profile Lens


Low profile lens with 20 ° SPOT beam aperture, suitable for most 3535 led sources with 1mm squared chip and equipped with primary lens. The correct beam aperture depends on the type of led source used. The lens is equipped with two pins for the correct positioning of the lens with respect to the led and a third pin only for support.

## Technical data

<b>Code</b>	LPL_D20_P20G
<b>Description</b>	Lens Ø20mm -20° FWHM - MEDIUM with legs
<b>Diametro (mm)</b>	20
<b>Thickness (mm)</b>	12,5

<b>FWHM (°)</b>	20
<b>Material</b>	PMMA HT121
<b>Finish</b>	Esa Larga
<b>Family</b>	Low profile lens

## Photometric diagrams and polar or Cartesian charts

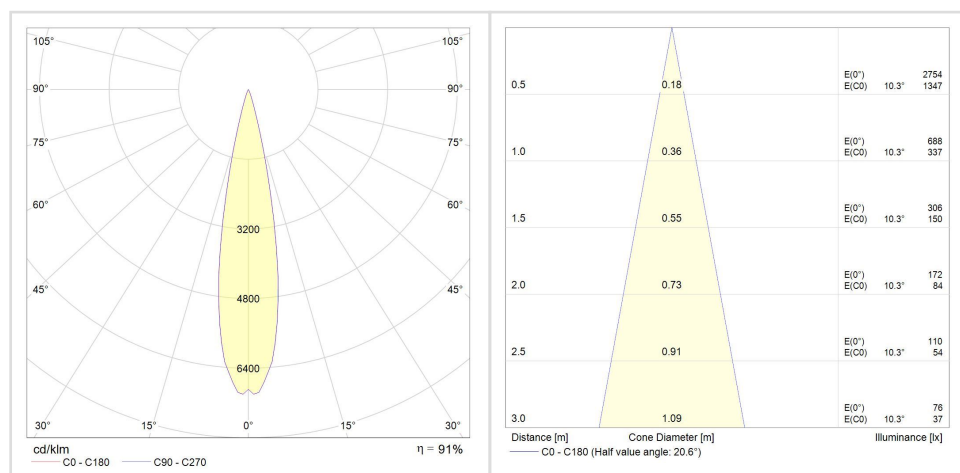

CREE XP-E led lighting data referenced to 100lm.